


- USE PROPER EQUIPMENT SUCH THAT THE SOIL IS SLICED, NOT TURNED OVER.
- GEOTEXTILE FABRIC EMBEDDED 8" TO 12" IN THE SOIL SLIT, LEAVING ABOUT 2' OF FABRIC ABOVE GROUND.
- COMPACT THE SOIL IMMEDIATELY NEXT TO THE GEOTEXTILE BY DRIVING OVER IT WITH A TRACTOR TIRE AT LEAST TWICE.
- STEEL T-POSTS PLACED ON DOWNSTREAM SIDE OF WATER FLOW EMBEDDED AT LEAST 2' INTO THE GROUND. MAXIMUM SPACING 6'. NIPPLES ON POST FACE AWAY FROM THE GEOTEXTILE TO KEEP TIES FROM SLIPPING ON POST.
- FOR STEEL POSTS USE 3 PLASTIC ZIP TIES (50 LB TENSILE) AT LEAST 1" APART TO SECURE THE GEOTEXTILE TO EACH POST WITHIN THE TOP 8".
- FENCE SHALL BE HEAVY DUTY TYPE.
- USE WOOD LATHE AND STAPLES ON FACE OF SILT FENCE TO SECURE TO WOOD POSTS.
- CONTRACTOR SHALL REMOVE FENCE AND POSTS PER SPECIFICATIONS.

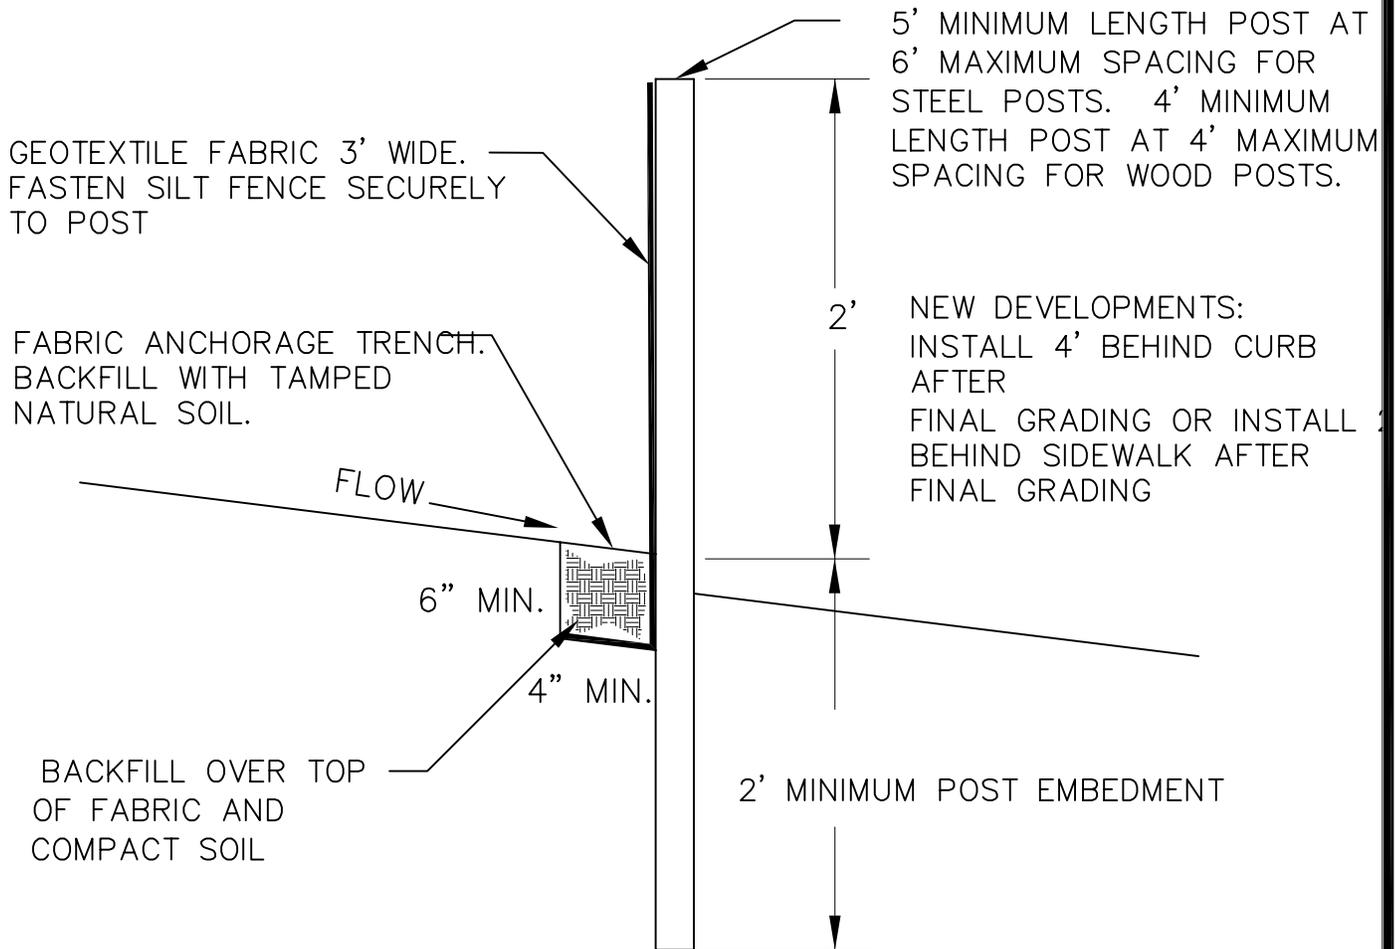

SILT FENCE MATERIALS SHALL MEET MNDOT SPECIFICATION 3886
 CONTRACTOR SHALL REMOVE FENCE AND POSTS PER SPECIFICATIONS.

HEAVY DUTY SILT FENCE

Plate No. EC-2



2014 STANDARD DETAIL PLATE

City of Blaine – Engineering Department

10801 Town Square Drive NE, Blaine, Minnesota 55449

(763)785-6172

Fax(763)785-6139